




≡ **ARMATUREN** ≡

**BEF-Kugelhahn** == 300 KP ==

1-tlg. Kompakt-Kugelhahn, mit vollem Durchgang PN 10/16-40



DN	L	H	W	Druckstufe	Gewicht in kg, ca.
25	43	75	150	PN 40	1,9
32	51	88	156	PN 40	2,9
40	63	110	180	PN 10/16	4,4
50	70	118	180	PN 10/16	5,6
65	107	140	282	PN 10/16	9,9
80	120	152	290	PN 10/16	12,8
100	152	168	325	PN 10/16	19,7

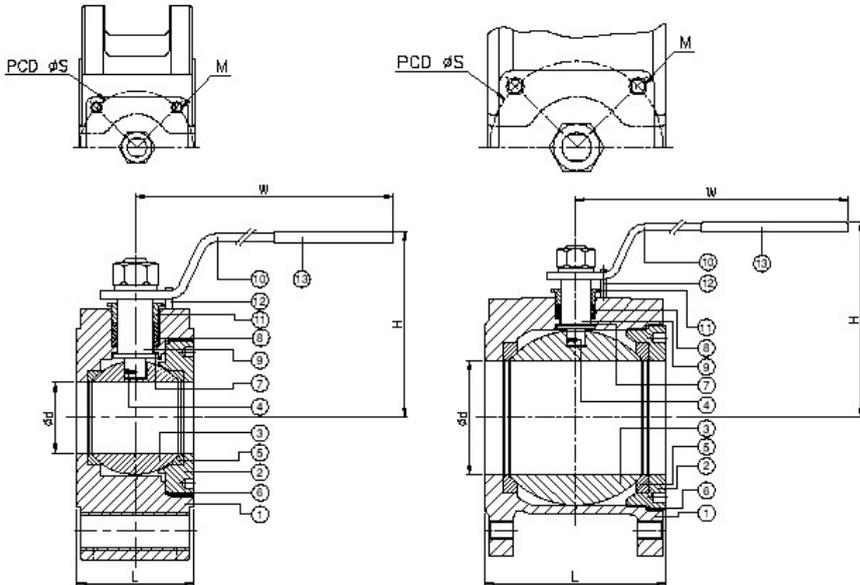

Teil d. Armatur	Werkstoff
Gehäuse	1.4408/316
Kugel	1.4401/316
Spindel	1.4401/316
Griff	1.4301/Vinyl
Gehäusedichtung	PTFE
Spindelabdichtung	PTFE

Verwendungsbereich: -20°C bis max. 200°C    Temperature Range: -20°C to max. 200°C

